

CF/RA4-10

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

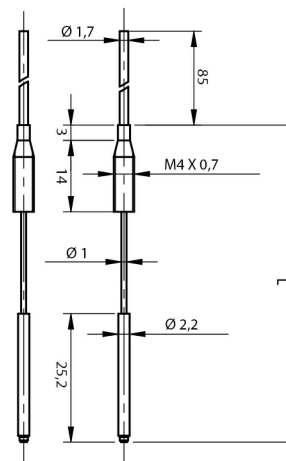

Detection properties

Distance with SSF	30 mm
Distance with FS1	30 mm
Distance with FX3	150 mm
Distance with FX4	250 mm
Distance with F1R	100 mm

Application

Function Principle	Through-beam P/R
Description	Plastic optical fibres

Mechanical data

Operating temperature	-40°C....+55°C (posa fissa)
1	1
1 mm	0,5 mm
M4 con sleeve	M4 with sleeve
vetro, ETM, inox	PE, plastic
ottone nichelato	nickel-plated brass

Test/Approvals

Degree of protection

IP67

Accessories

Accessories to be ordered
separately

AF/1A2

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

05/05/2020 14:41:24